


LE 200/070 EBW

Voltage range:
0 V/+200 V

Manual setting of DC-Offset
(superimposed to external signal)

Variable attenuation

70 kHz bandwidth (-3 dB)

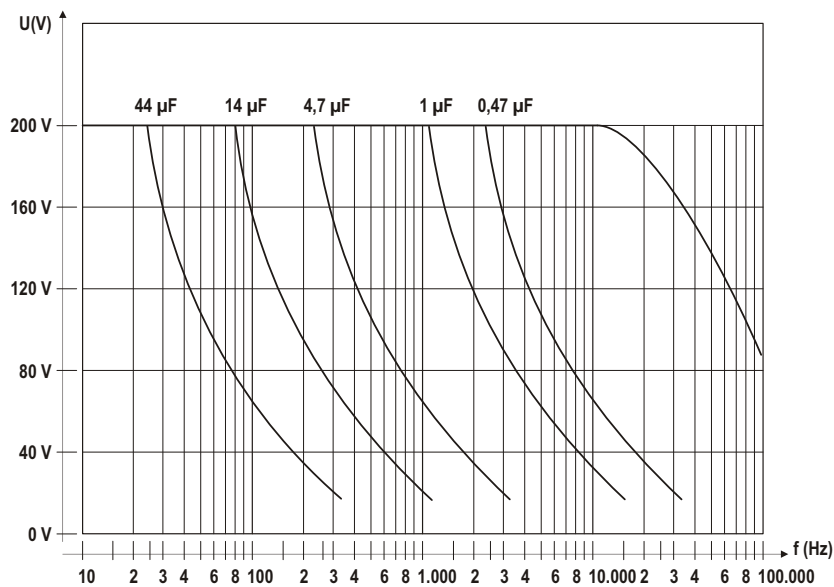

Input:

Signal: ± 5 V (± 10 V with attenuation)
Impedance: 5 kOhms
Connector: BNC

Output:

Connector: BNC
Voltage total: 0 V thru +200 V
DC-Offset range: 0 V thru +200 V
Gain: 40 (without attenuation)
Peak current: 700 mA
Average current: 250 mA
Noise: 20 mVpp (for 4.7 µFarad load)
Display: LCD
Dimensions W x D x H (mm):
320 x 260 x 165
Weight: 7 kg


LE 200/150 EBW (single channel)

Voltage range:
0 V/+200 V

Manual setting of DC-Offset
(superimposed to external signal)

Variable attenuation

70 kHz bandwidth (-3 dB)

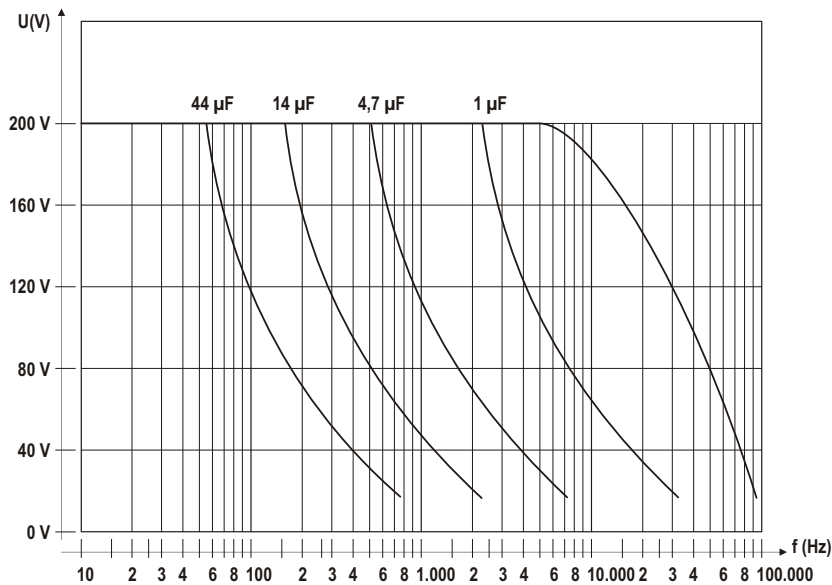

Input:

Signal: ± 5 V (± 10 V with attenuation)
Impedance: 5 kOhms
Connector: BNC

Output:

Connector: BNC
Voltage total: 0 V thru +200 V
DC-Offset range: 0 V thru +200 V
Gain: 40 (without attenuation)
Peak current: 1500 mA
Average current: 500 mA
Noise: 20 mVpp (for 4.7 µFarad load)
Display: LCD
Dimensions W x D x H (mm):
(single channel): 380 x 340 x 180
Weight:
(single channel): 9 kg

Modular concept:

Up to three independent channels can be integrated into one cabinet.

Ordering code: LE 200/150-2: (2 channels)

LE 200/150-3: (3 channels)


LE 200/500

Voltage range:
0 V/+200 V

Manual setting of DC-Offset
(superimposed to external signal)

Variable attenuation

For high capacitance actuators > 2 μF

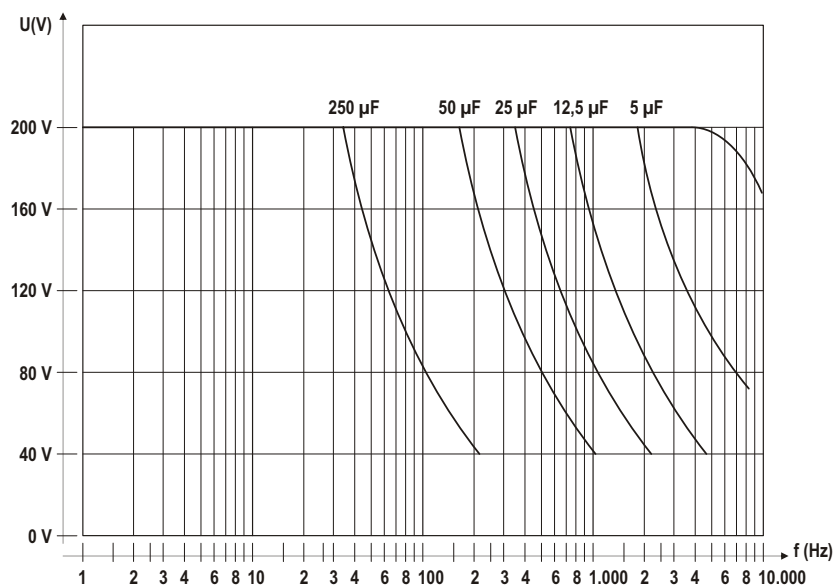

Input:

Signal: ± 5 V (± 10 V with attenuation)
Impedance: 5 kOhms
Connector: high current bunch type or coaxial systems on request:
Ask PIEZOMECHANIK for details

Output:

Connector: BNC
Voltage total: 0 V thru +200 V
DC-Offset range: 0 V thru +200 V
Gain: 40 (without attenuation)
Peak current: 5 A
Average current: 1800 mA
Noise: 50 mVpp (for 10 μFarad load)
Display: LCD
Dimensions W x D x H (mm): 440 x 370 x 230
Weight: 15 kg