


SVR 200/1 (single channel)
SVR 200/3 (3 independent channels)

Voltage range:
 -50 V thru + 200 V

Manual setting of DC-Offset
 (superimposed to external signal)

Variable attenuation

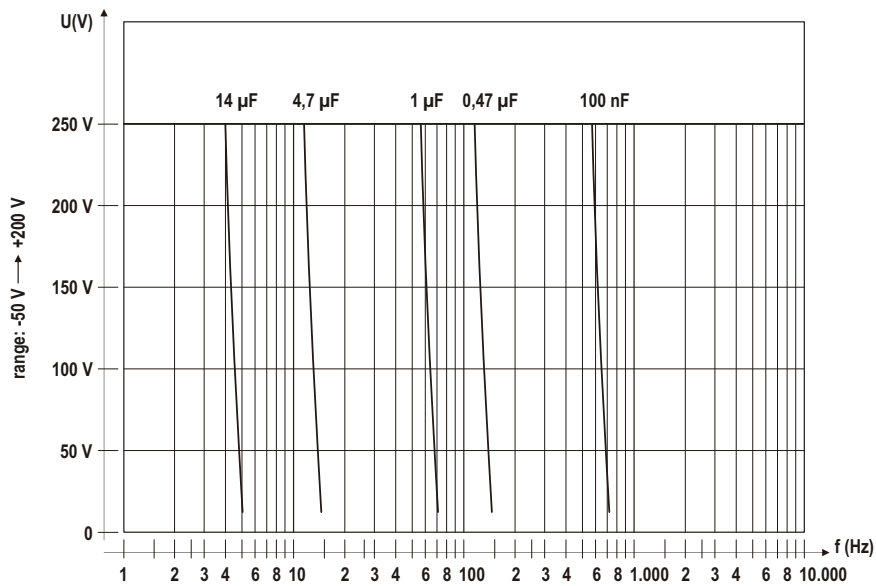

Input:

Signal: +/-5 V (+/-10 V with attenuation)
 Impedance: 5 kOhms
 Connector: BNC

Output:

Connector: BNC
 Voltage total: -50 V thru +200 V
 DC-Offset range: -50 V thru +200 V
 Gain: 40 (without attenuation)
 Max. current: 45 mA
 Noise: 1 mVpp (for 4 μFarad load)
 Display: LCD
 Dimensions W x D x H (mm):
 single channel: 165 x 200 x 65
 3-channels: 260 x 320 x 155
 Weight:
 single channel: 1.75 kg
 3-channels: 4.7 kg

Additional features of 3 channel SVR 200/3 amplifier:

Monitor BNC output per channel:
 shows 1:1000 piezo voltage
 LC-Display per channel