


# Analog High Voltage Amplifiers LE

## LE 430/015 (single channel)

Voltage range:  
0 V/+430 V

Manual setting of DC-Offset  
(superimposed to external signal)

Variable attenuation

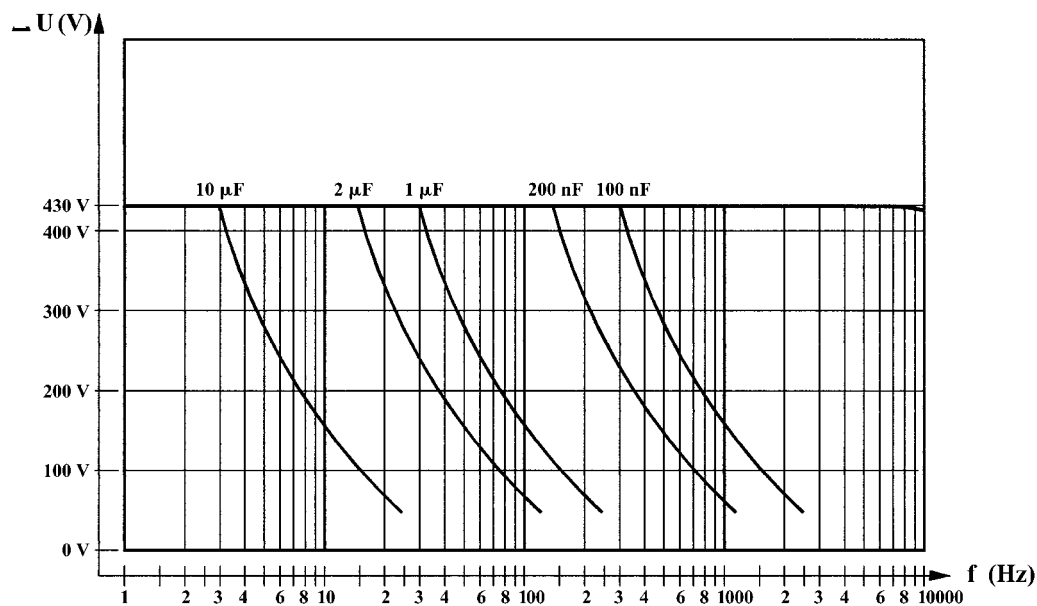

### Input:

Signal:  $\pm 5$  V ( $\pm 10$  V with attenuation)

Impedance: 5 kOhms

Connector: BNC

### Output:

Connector: BNC

Voltage total: 0 V thru +430 V

DC-Offset range: 0 V thru +430 V

Gain: 86 (without attenuation)

Peak current: 150 mA (for 200 msec)

Average current: 30 mA

Noise: 10 mVpp (for 2.2  $\mu$ Farad load)

Display: LCD

Dimensions W x D x H (mm):  
260 x 320 x 155

Weight: 4.6 kg