


# LE 500/200

Voltage range:  
0 V/+500 V

Manual setting of DC-Offset  
(superimposed to external signal)

Variable attenuation

For high capacitance actuators > 1  $\mu\text{F}$

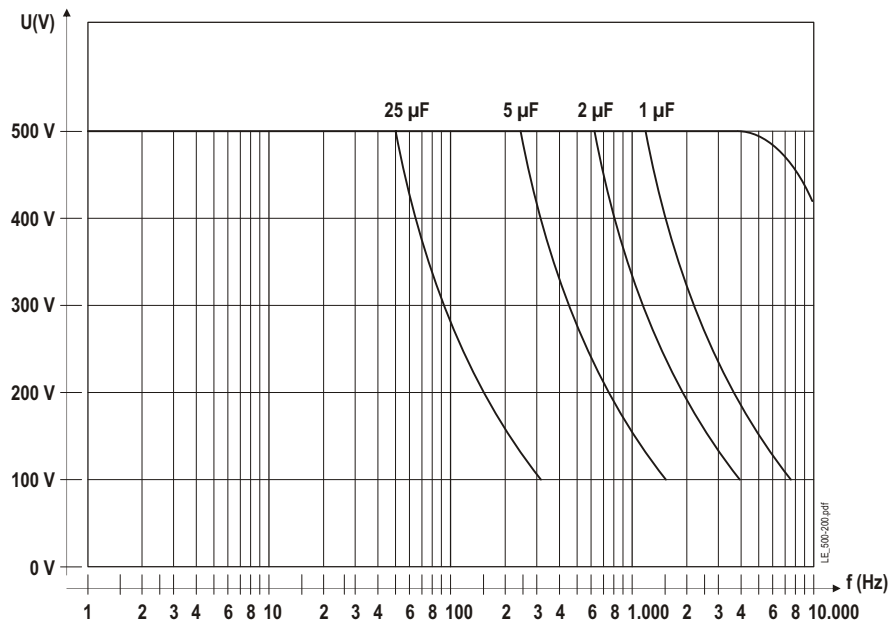

## Input:

Signal:  $\pm 5$  V ( $\pm 10$  V with attenuation)

Impedance: 1 k $\Omega$

Connector: BNC

## Output:

Connector: High current bunch type or coaxial systems on request:  
Ask PIEZOMECHNIK for details

Voltage total: 0 V thru +500 V

DC-Offset range: 0 V thru +500 V

Gain: 100)

Peak current: 2 A

Average current: 700 mA

Noise: 50 mV for 2  $\mu\text{F}$  load

Display: LCD

Dimensions W x D x H (mm):

440 x 370 x 230

Weight: 8.5 kg