


High Power Switching Amplifier RCV 500/15 (single channel)

Voltage range:
0 V/+500 V

Manual setting of DC-Offset
(superimposed to external signal)

Variable attenuation

For capacitive loads > 5 μF typically

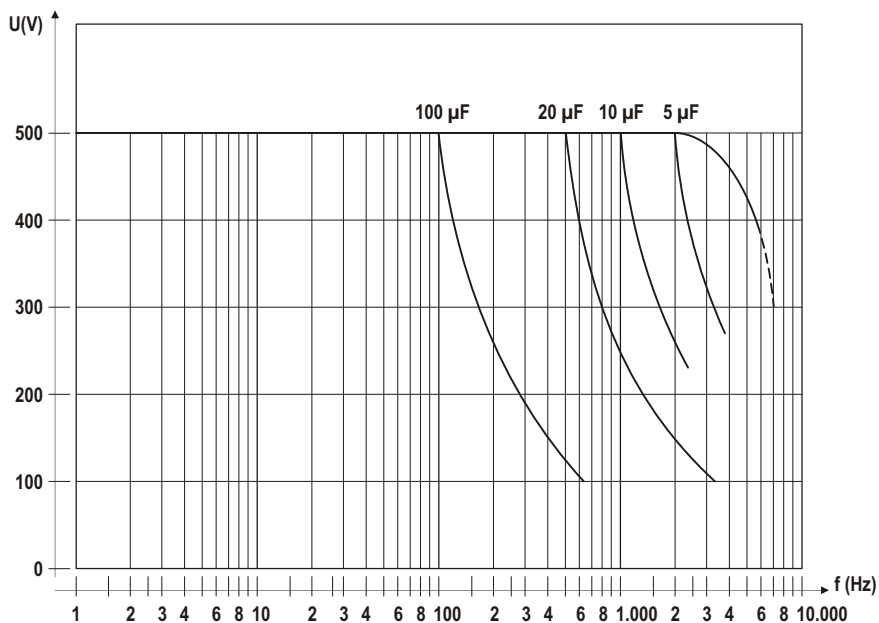

Input:

Signal: ± 5 V (± 10 V with attenuation)

Impedance: 1 k Ω

Connector: BNC

Output:

Connector: High current bunch type or coaxial systems on request:
Ask PIEZOMECHNIK for details

Voltage total: 0 V thru +500 V

DC-Offset range: 0 V thru +500 V

Gain: 100

Peak current: 15 A

Average reactive current: 5 A

Noise: > 1V f (depends on load)

Display: LCD

Dimensions W x D x H (mm):
440 x 370 x 230

Weight: 15 kg